

GS60C, Range with Two Oven



Product Details:

- All stainless steel exterior and sides.
- 10 Cast iron open burners, each 30,000 BTU
- Thermostat (250F - 550F) controlled oven
- Welded frame structure for best stability
- Standby S/S pilot for easy start
- Adjustable heavy duty legs
- 12"x12" cast iron grates
- Both LP & NAT gas type available

Product Details:


- U shape oven burner with 31,000 BTU
- Thermal coupling safety valve for the oven
- stainless steel handle for bottom oven
- kick plate at the bottom for easy access for serving
- 3/4" NPT rear gas connection
- Anti-clogging pilot cover under the grate
- 10 open burners and 2 ovens

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View

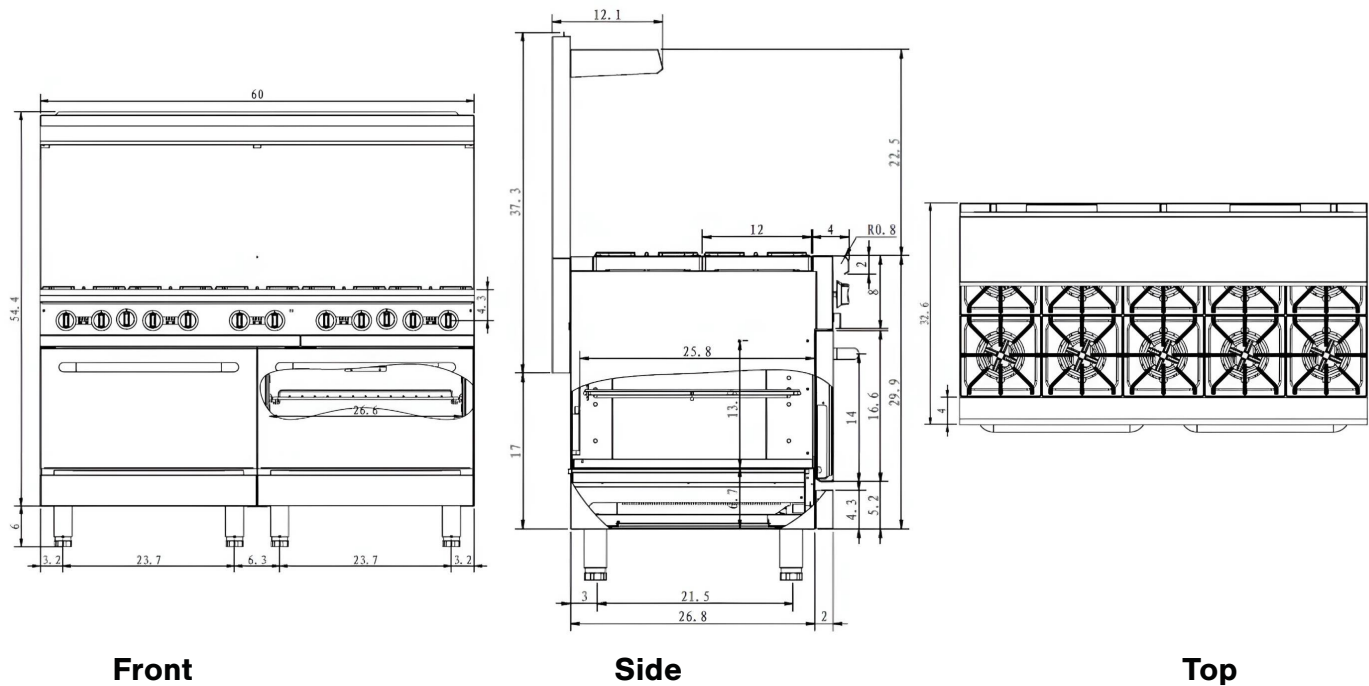

Front

Side

Top

Specifications

Model	Description	Total BTU	Dimensions	N/W (LB)	G/W (LB)
GS60C	Gas Range with two oven	362,000	60"x32.6"x60.5"	617	739

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.

