



GENKRAFT

PRODUCT CATALOG



 genkraft.com

 Orders@genkraft.com

 | (562) 464-9901 | (714) 547-9218

 11990 Rivera Rd. Santa Fe Springs, CA 90670

GGC-100, Gas Convection Oven



Product Details:

- Single full-size capacity
- Heating sources, Gas burners
- Electronic spark ignition system
- Durable stainless-steel exterior
- Porcelain enamel coated interior
- Two independent doors with double-pane glass windows
- 3 chrome-plated oven racks



Product Details:


- Adjustable bullet-style feet
- Solid-state thermostat control
- Two-speed fan motor
- 60-minute timer
- Holding temperature range from 150°F to 500°F
- Ten rack positions with 1½-inch spacing

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View

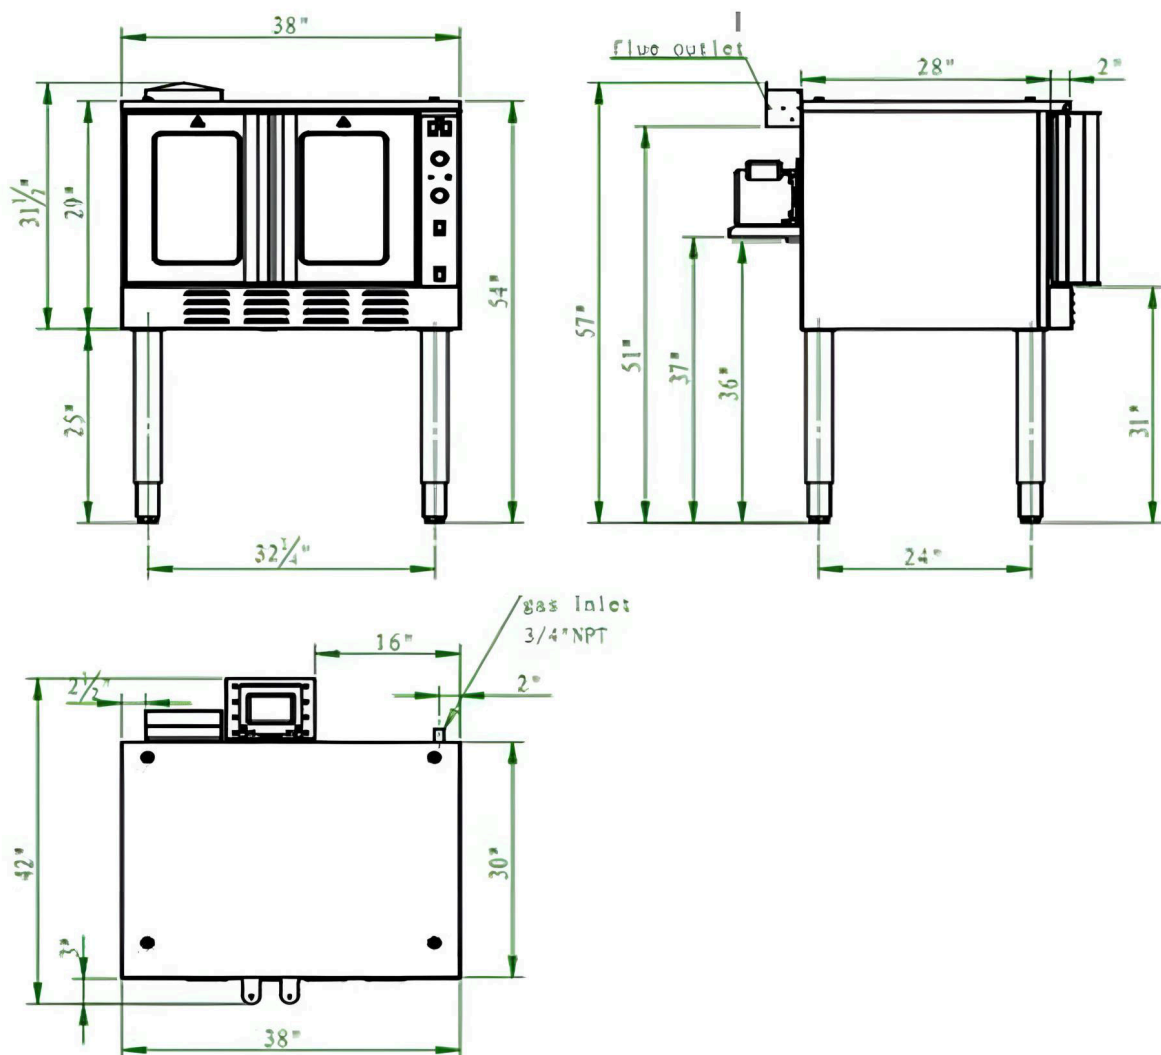

Specifications

Model	Racks	External Dimensions			Internal Oven Dimensions			Total BTU	AMP	Volts	Net. Weight
GGC100	3	Width	Depth	Height	Width	Depth	Height	54,000	5.9	120	403 lb
		38"	42"	57"	29"	22"	20"				

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



GEC100D-L, Electric Convection Oven



▶ Product Details:

- Full-size single-unit design
- Heating sources: Resistance-type electric heating element
- Electrical Configuration: Single-phase or three-phase, 208 VAC or 240 VAC
- Durable stainless-steel exterior
- Porcelain enamel coated interior
- Two independent doors with double-pane glass windows
- 3 chrome-plated oven racks

▶ Product Details:


- Ten rack positions with 1½-inch spacing
- Adjustable steel legs with bullet feet
- Solid-state thermostat for accurate temperature control
- Two-speed fan motor for consistent airflow
- 60-minute continuous-ring timer with manual shutoff
- Temperature holding range from 150°F to 550°F

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View

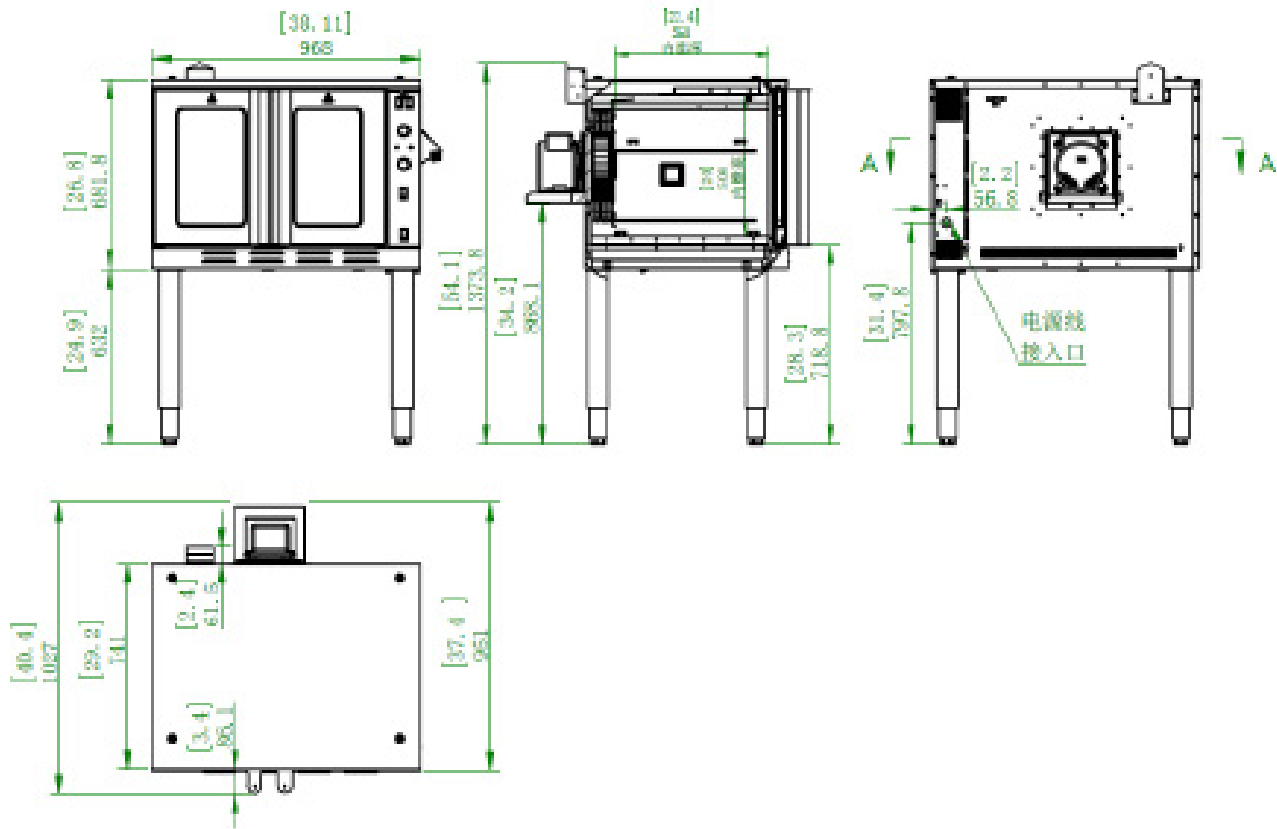

Specifications

Model	Racks	External Dimensions			Internal Oven Dimensions			Total BTU	T. Power	Volts	Phase	Net. Weight
GEC100D-L	3	Width	Depth	Height	Width	Depth	Height	54,000	11KW	208	3	359 Lbs
		38"	41.5"	54"	29"	22"	20"					
GEC100D-L	3	38"	41.5"	54"	29"	22"	20"	54,000	11KW	208	1	359 Lbs

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



GS60C, Range with Two Oven



Product Details:

- All stainless steel exterior and sides.
- 10 Cast iron open burners, each 30,000 BTU
- Thermostat (250F - 550F) controlled oven
- Welded frame structure for best stability
- Standby S/S pilot for easy start
- Adjustable heavy duty legs
- 12"x12" cast iron grates
- Both LP & NAT gas type available



Product Details:


- U shape oven burner with 31,000 BTU
- Thermal coupling safety valve for the oven
- stainless steel handle for bottom oven
- kick plate at the bottom for easy access for serving
- 3/4" NPT rear gas connection
- Anti-clogging pilot cover under the grate
- 10 open burners and 2 ovens

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View

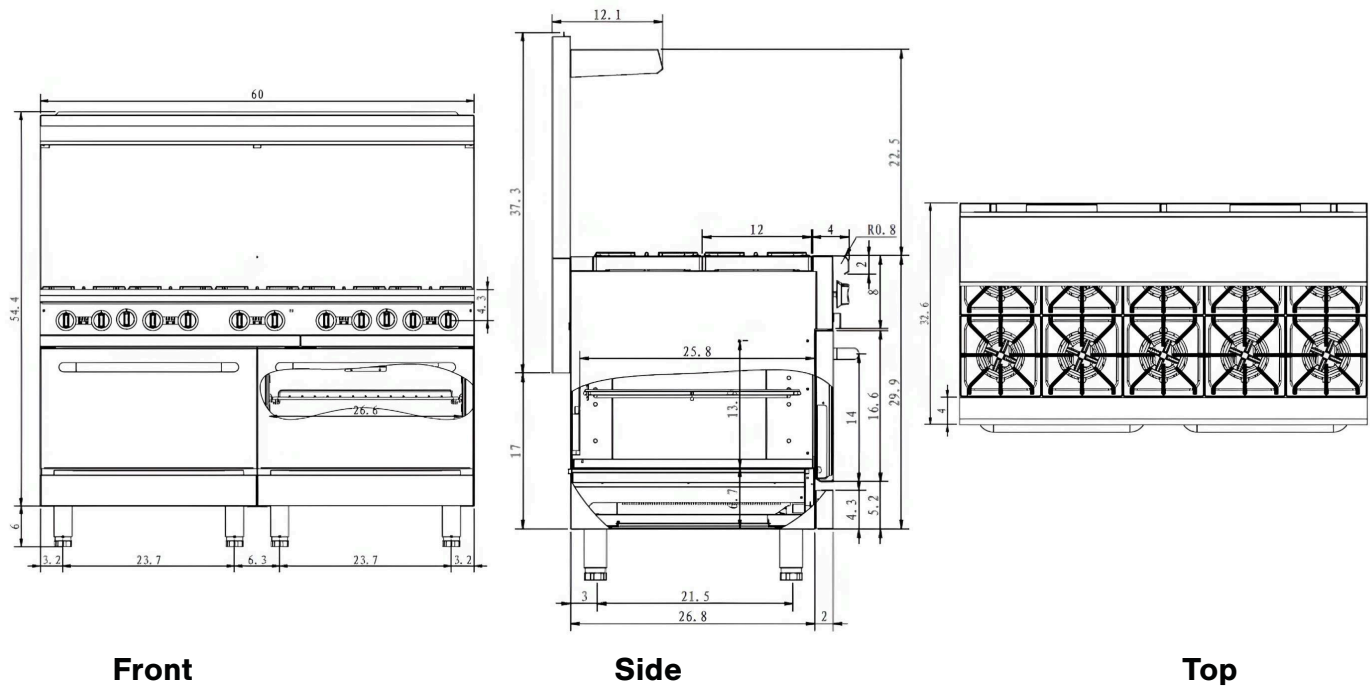

Specifications

Model	Description	Total BTU	Dimensions	N/W (LB)	G/W (LB)
GS60C	Gas Range with two oven	362,000	60"x32.6"x60.5"	617	739

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



GS60-GS24, Range with Two Oven & 24" Griddle



▶ Product Details:

- All stainless steel exterior and sides.
- Cast iron open burners (6), each 30,000 BTU
- Thermostat (250F - 550F) controlled oven
- 24"x21 3/8", 3/4" thick manual steel griddle/broiler with (3) 12,000 BTU burners.
- 9 1/2" deep back shelf and 4 1/2" plate rail for added storage and safety.

▶ Product Details:


- Manual open burner control type.
- Griddle location is on right.
- stainless steel handle for bottom oven
- 4 racks.
- 3/4" NPT rear gas connection
- One year limited parts and labor warranty
- Adjustable heavy duty legs.

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View

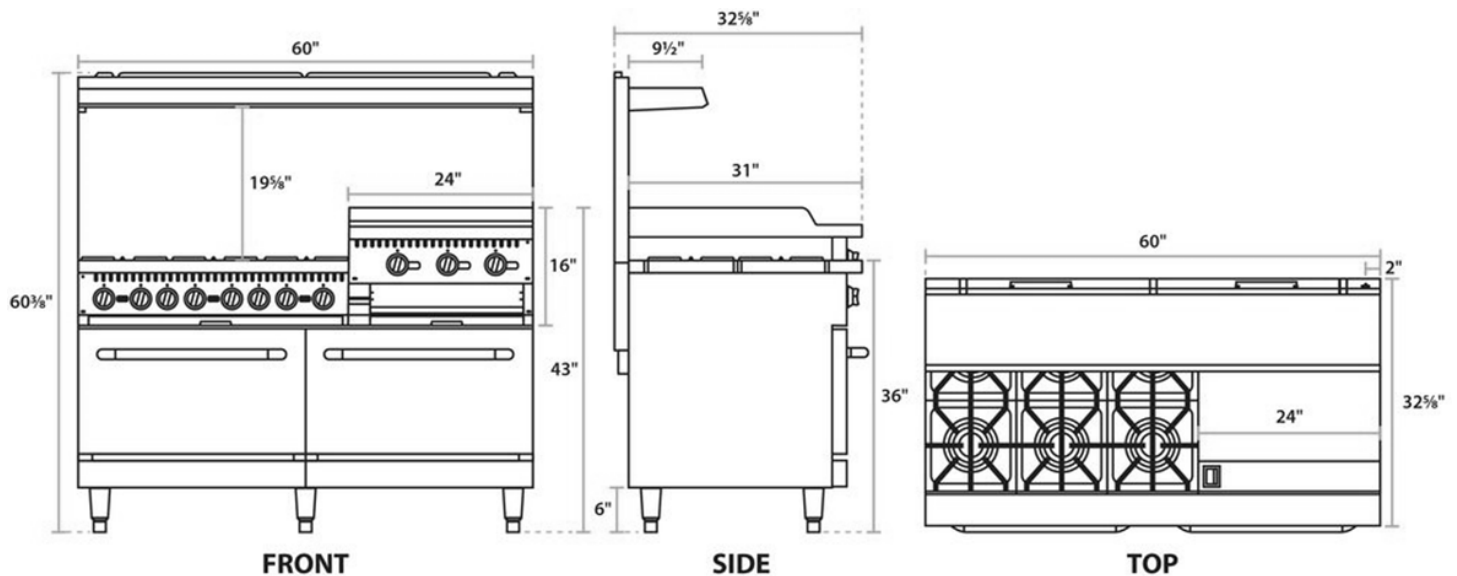

Specifications

Width	60 Inches
Depth	32 5/8 Inches
Height	60 3/8 Inches
Broiler Width	20 Inches
Broiler Depth	21 1/8 Inches
Broiler Height	6 1/4 Inches
Oven Interior Width	26 7/8 Inches
Oven Interior Depth	21 1/8 Inches
Oven Interior Height	13 7/8 Inches
Open Burner BTU	30000 BTU
Oven Burner BTU	30000 BTU
Griddle Burner BTU	30000 BTU
Total BTU	30000 BTU

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



GS36C Range with Convection Oven



Product Details:

- All stainless steel exterior and sides.
- Cast iron burners, each 30,000 BTU
- Thermostat (250F - 500F) controlled oven
- 9 1/2" deep shelf and 4 1/2 plate rail for added storage.
- Adjustable heavy duty legs
- Oven BTU, 32,000



Product Details:


- Gas connection size 3/4"
- Maximum temperature, 500 degrees F
- 2 racks
- 6 open burners
- One Convection Oven
- Both LP & NAT options available

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View

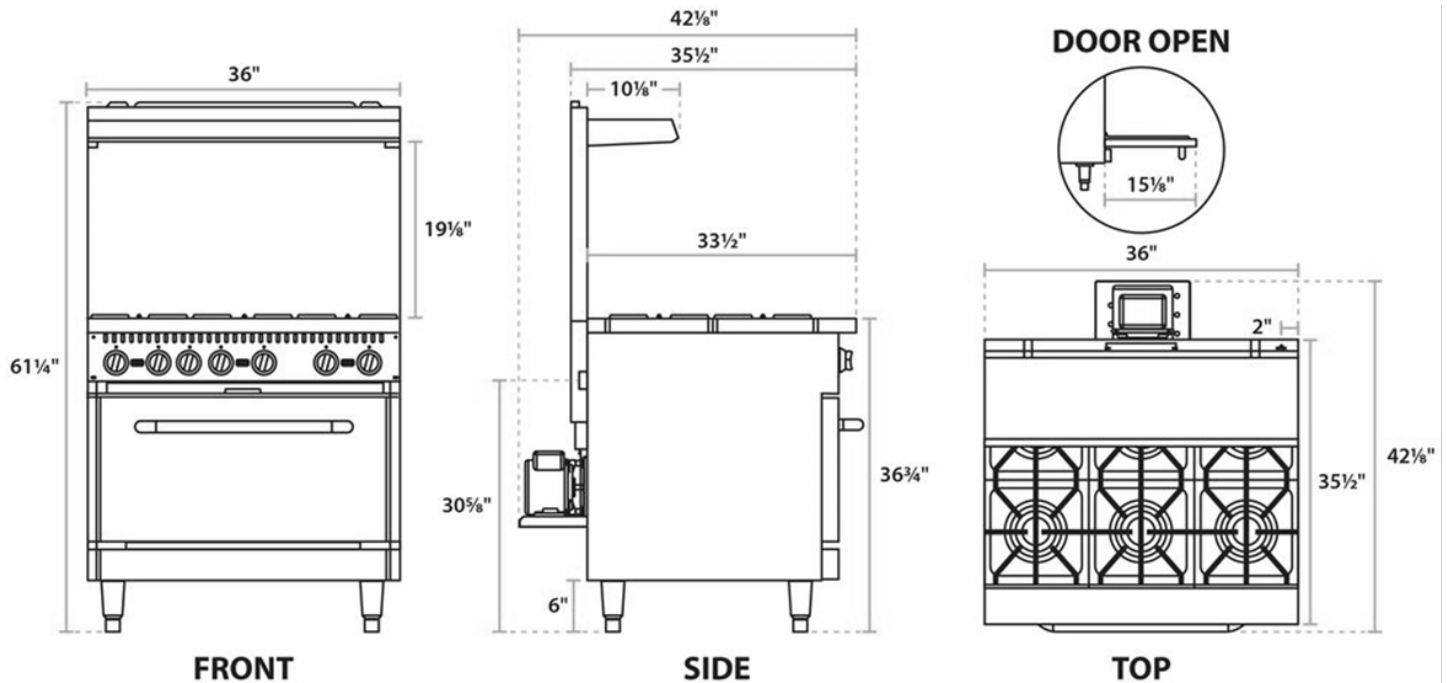

Specifications

Model	Description	Total BTU	Dimensions	Oven interior Dims
GS36C	Gas Range with oven	212,000	36"x45 5/8"x61 9/32"	26 4/5"x26 3/32"x14"

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



C24GG, 24" Manual Griddle



Product Details:


- Counter top-style unit
- 3/4" thick polished steel griddle plate
- 24" wide x 20 11/16" deep cooking surface
- Equipped with (2) 30,000 BTU U-shaped burners
- Burners distribute heat evenly every 6" across the griddle
- Durable stainless steel body
- Manual controls
- 3 1/4" front grease can
- Removable stainless steel grease tray
- 4" high welded back-splash with side splashes
- Front-accessible pilot lights
- Double-wall design with insulated side panels
- Adjustable, non-slip stainless steel legs

- Not suitable for installation in non-commercial or residential applications.


Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.




Plan View

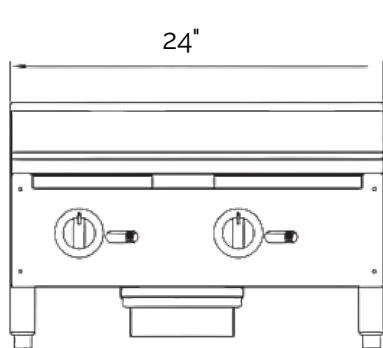

Front

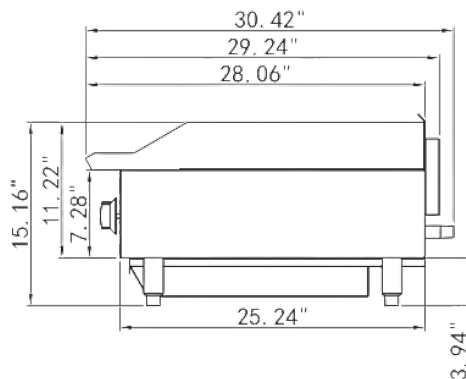

Side

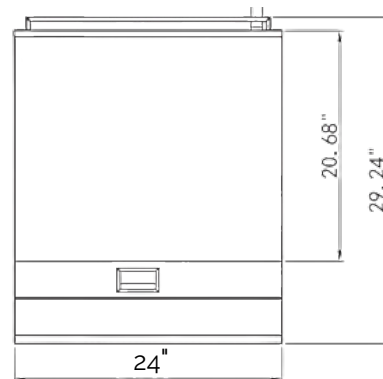

Top

Specifications

Model	Burners	Total BTU	Dimensions	Cooking Area
C24GG	2	60,000	24" Wx 29.5"D x 15.25"H	20.6 x 36
C36GG	3	90,000	36" Wx 29.5"D x 15.25"H	20.6 x 24
C48GG	4	120,000	48" Wx 29.5"D x 15.25"H	20.6 x 48

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



C36GG, 36" Manual Griddle



▶ Product Details:


- Counter top-style unit
- 3/4" thick polished steel griddle plate
- 36" wide x 20 11/16" deep cooking surface
- Equipped with (3) 30,000 BTU U-shaped burners
- Burners distribute heat evenly every 6" across the griddle
- Durable stainless steel body
- Manual controls
- 3 1/4" front grease can
- Removable stainless steel grease tray
- 4" high welded back-splash with side splashes
- Front-accessible pilot lights
- Double-wall design with insulated side panels
- Adjustable, non-slip stainless steel legs

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View

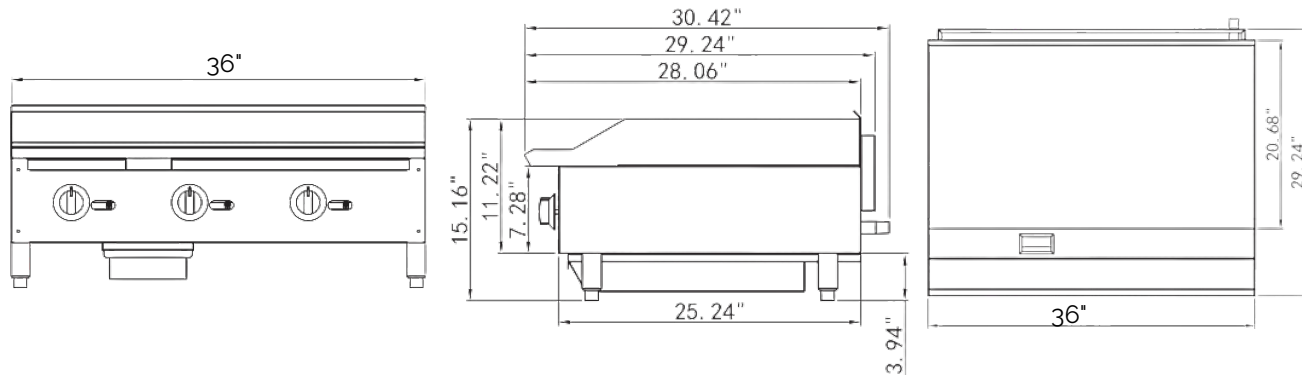

Front

Side

Top

Specifications

Model	Burners	Total BTU	Dimensions	Cooking Area
C24GG	2	60,000	24" Wx 29.5"D x 15.25"H	20.6 x 36
C36GG	3	90,000	36" Wx 29.5"D x 15.25"H	20.6 x 24
C48GG	4	120,000	48" Wx 29.5"D x 15.25"H	20.6 x 48

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



C48GG, 48" Manual Griddle



▶ Product Details:


- Counter top-style unit
- 3/4" thick polished steel griddle plate
- 48" wide × 20 11/16" deep cooking surface
- Equipped with (4) 30,000 BTU U-shaped burners
- Burners distribute heat evenly every 6" across the griddle
- Durable stainless steel body
- Manual controls
- 3 1/4" front grease can
- Removable stainless steel grease tray
- 4" high welded back-splash with side splashes
- Front-accessible pilot lights
- Double-wall design with insulated side panels
- Adjustable, non-slip stainless steel legs

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View

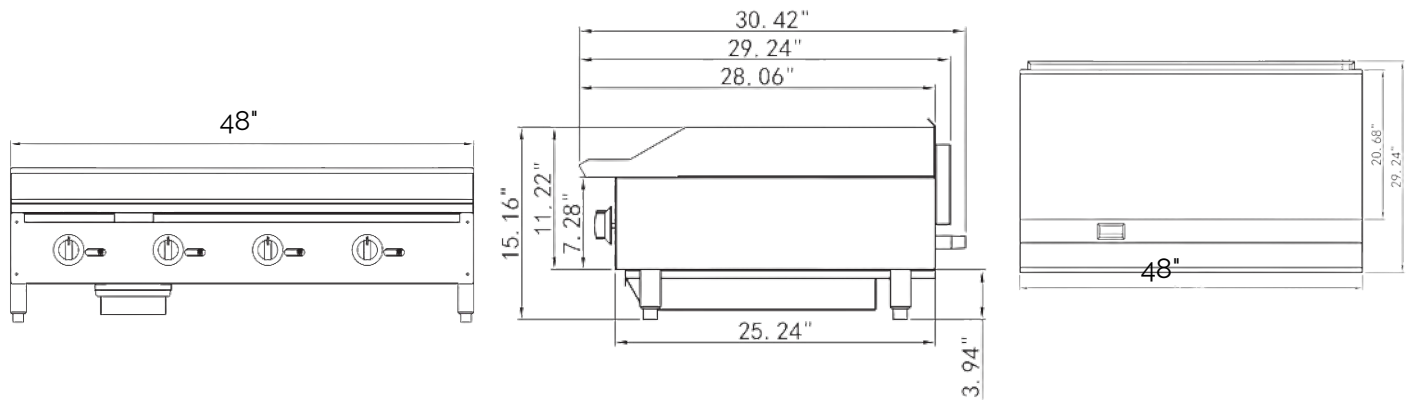

Front

Side

Top

Specifications

Model	Burners	Total BTU	Dimensions	Cooking Area
C24GG	2	60,000	24" Wx 29.5"D x 15.25"H	20.6 x 36
C36GG	3	90,000	36" Wx 29.5"D x 15.25"H	20.6 x 24
C48GG	4	120,000	48" Wx 29.5"D x 15.25"H	20.6 x 48

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



GenKraft 50 Lb Commercial Electric Fryer



Product Details:

- Durable all-stainless-steel construction for long-lasting performance, corrosion resistance and easy cleaning.
- Large-capacity fry pot holds approximately 50–53 lbs. of cooking oil, ideal for high-production frying applications.
- Equipped with two large-capacity fryer baskets for increased cooking efficiency and productivity.
- Includes a stainless steel cover lid to help protect oil when the fryer is not in use.
- Adjustable temperature range from 166°F to 374°F (74°C to 190°C) for precise cooking control.
- Powerful electric heating system rapidly heats oil to the desired temperature in approximately 2–5 minutes, reducing wait times and increasing output.
- Fast heat recovery and consistent cooking temperatures make it ideal for high-volume, fast-paced restaurant environments.
- Thermostat-controlled operation maintains accurate oil temperature for consistent frying results and improved product quality.
- Floor-standing design provides stability and easy integration into commercial kitchen layouts.
- Electrical Requirements: 208V, 3-Phase.

- **Not suitable for installation in non-commercial or residential applications.**


Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Plan View


Structure Schematic Diagram:

FTE01

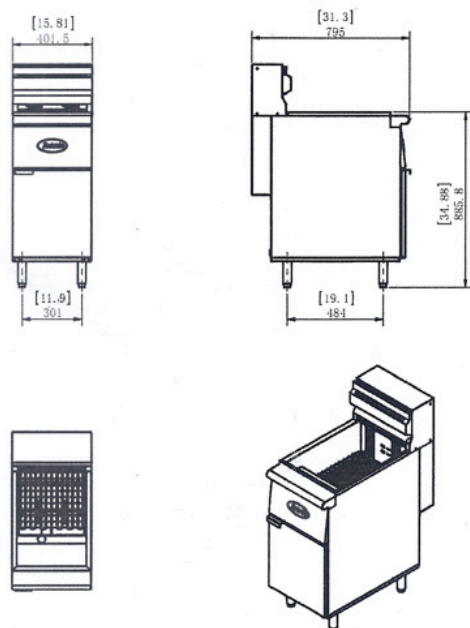

Electrical Diagram:

AC/N3-208V&240V/60Hz 18kW

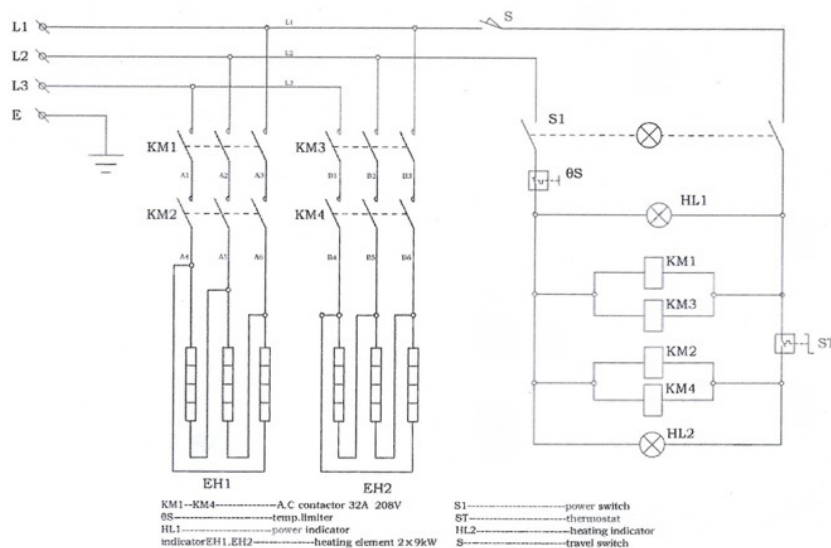

Specifications

Width	15.75 Inches
Depth	31.5 Inches
Height	43.3 Inches
Power	18000 W
Temperature Range	166 F - 374 F
Power Control Way	Switch
Heating Element	Immersion Heating. E
Capacity	50 lbs to 53 lbs
Finish Style	Stainless Steel
Voltage	208V
Phase	3 Phases
Number of Basket	2
N/Weight	132 Lbs

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



GenKraft GBT-3500Z8C Commercial Induction Fryer



Specifications

Width	12.5 Inches
Depth	17.7 Inches
Height	16.9 Inches
Power	3000 W
Temperature Range	140 F - 374 F
Power Control Way	Knob
Heating Element	Induction
Capacity	13 L / 13.7 QT
Finish Style	Stainless Steel
Voltage	208V
Phase	Single Phase
Number of Basket & Lid	1
N/Weight	30.7 Lbs

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Reach-in Cooler

Single Glass Door - SR40VG



Standard Features

- 13.5 cu. ft. capacity with 4 adjustable shelves.
- 132 lb. shelf capacity for reliable storage.
- Energy-efficient design uses only 855 kWh/year.
- Low-E glass door improves insulation and visibility.
- Adjustable temperature range: 35°F–46°F.
- Bright LED lighting showcases products clearly.
- Built-in lock secures contents.

Specifications

Model	Dimensions	Capacity	Temperature range	Voltage	Weight
SR40VG	25" x 23.5" x 72.5"	13.5 Cu. Ft	35°F–46°F	110.0	150 Lib



- **Roomy Interior:** this refrigerator offers generous storage space for a wide range of items. Each shelf supports up to 132 lbs.
- **Energy Saving:** this unit is built for energy efficiency, helping lower your electricity bills.
- **Durable Triple-Paned Glass Door:** The door is constructed with triple-pane Low-E glass for enhanced insulation and strength, while still allowing clear visibility of the contents.
- **Accurate Temperature Control:** Easy-to-use mechanical controls let you set and maintain temperatures between 35°F and 46°F, keeping your products at their ideal temperature.
- **Bright LED Lighting:** Energy-efficient LED lights positioned at the top provide excellent illumination, making your products stand out.
- **Built-In Security Lock:** Comes with an integrated safety lock to protect contents and prevent unauthorized access.

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Out-door Refrigerator

CBC-140



▶ Standard Features

- Refrigerator Temperature Range: 33°F to 60°F
- Commercial Style Recessed Door Handle
- Front Venting, NO SPACE Needed Behind for flush Installation
- Bright White LED Lighting
- Reversible Right-hand Hinged Door
- Four Adjustable Leveling Legs
- Two Shelves with Adjustable Placement for Easy Storage of any Sized Item
- Convection Cooling System, Consistence Temperature, Quick Cool Down
- Stainless Steel Full Wrap Door and Toe-kick
- Steel Body with Black Powder Coat Pint



White Interior



Door Lock
and Key

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice, to make changes and revisions in product specifications, materials and design, which in our opinion will provide better performance, durability and efficiency



Plan View

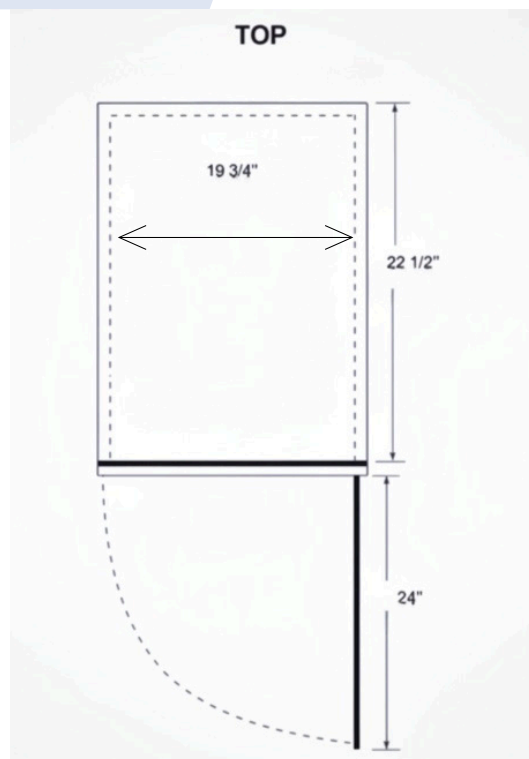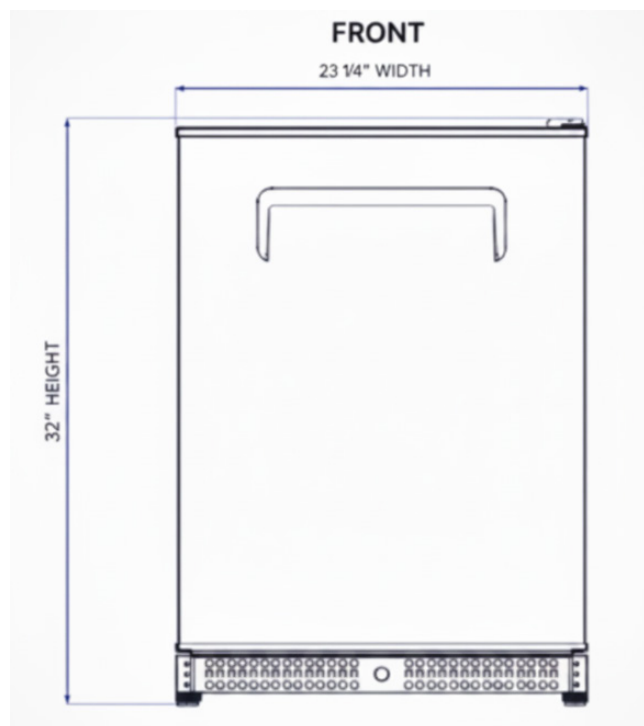

Specifications

Voltage	110-120 v/60Hz
Width	23 1/4"
Height	32"
Depth	24 1/2"
Door Color	Stainless Steel
Cabinet Color	Black
Effective Volume	4.8 Cu. Ft
Refrigerant	R600a
Charge	10z/28g
Lamp Power	1.45W
Insulation Blowing Gas	C5H10
Rating Current	12A
N/Weight	89 Lbs

- Not suitable for installation in non-commercial or residential applications.

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Reach-In Cabinets

• Self-contained • Olympia Series

Standard Features

- Upright Cabinet-Refrigerator/Freezer
- Interior & Exterior Stainless Steel
- Self Closing and Reversible Doors
- Easy Removable Magnetic Seals
- Lock and Key
- Internal Light LED
- Digital Thermostat
- Automatic Defrost
- Heavy Duty Coated Shelves
- Lockable Casters



GST23-BR /
GST23-BF



GST23-BRG /
GST23-BFG

SPECIFICATIONS

	GST23-BR	GST23-BRG	GST23-BF	GST23-BFG
Unit Dimensions: (WxDxH)inches	27 x 32 x 83.5	27 x 32 x 83.5	27 x 32 x 83.5	27 x 32 x 83.5
Inside Dimensions: (WxDxH)inches	22.2 x 27 x 50.8	22.2 x 27 x 50.8	22.2 x 27 x 50.8	22.2 x 27 x 50.8
Net Capacity (cu.ft.)	23	23	23	23
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Coolant	R290	R290	R290	R290
Voltage (V/Hz)	115/60	115/60	115/60	115/60
Temperature (F)	33° to 41°	33° to 41°	-10° to 10°	-10° to 10°
Number of shelves	3	3	3	3
Interior Light	LED	LED	LED	LED

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Reach-In Cabinets

• Self Contained • Olympia Series

Standard Features

Upright Cabinet Refrigerator/Freezer

Interior & Exterior Stainless Steel

Self Closing and Reversible Doors

Easy Removable Magnetic Seals

Lock and Key

Internal Light: LED

Digital Thermostat

Automatic Defrost

Heavy Duty Coated Shelves

Lockable Casters



GST49-BR /
GST49-BF



GST49-BRG /
GST49-BFG

SPECIFICATIONS

	GST49-BR	GST49-BRG	GST49-BF	GST49-BFG
Unit Dimensions: (WxDxH inches)	54 x 32 x 83.5	54 x 32 x 83.5	54 x 32 x 83.5	54 x 32 x 83.5
Inside Dimensions: (WxDxH inches)	49.5 x 27 x 50.8	49.5 x 27 x 50.8	49.5 x 27 x 50.8	49.5 x 27 x 50.8
Net Capacity (cu.ft.)	49	49	49	49
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Coolant	R290	R290	R290	R290
Voltage (V/Hz)	115/60	115/60	115/60	115/60
Temperature (F)	330 to 410	330 to 410	-100 to 100	-100 to 100
Number of shelves	6	6	6	6
Interior Light	LED	LED	LED	LED

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Back-Bar Bottle Coolers



GBB-230

Standard Features

Interior & Exterior Stain:less Steel

Double Paned,Tempered,
Low-Glass Doors.

LEDInterior Light

Lock and Key

Hinged Door

Bottom Digital Controller

External Handle

Adjustable Feet

Front Exhaust - back can be flushed against the wall

SPECIFICATIONS

	GBB-130	GBB-230	GBB-350
Door	Hinged	Hinged	Hinged
Unit Dimensions: (WxDxH- inches)	23 3/4 x 20 1/2x 35 1/2	35 1/2x 20 1/2x 35 1/2	53 1/4x 20 1/2x 35 1/2
Weight (Lbs)	122lbs	155lbs	214lbs
Capacity (cu..ft)	4.9	7.5	11.5
Cooling System	Ventilated	Ventilated	Ventilated
Temperature (Fahrenheit)	350-470	350-470	350-470
Shelves	2	4	6
Interior Light	LED	LED	LED
Coolant	R600a	R600a	R600a

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design,which in our opinion will provide better performance,durability and efficiency.



Sandwich

•Prep-tables

Standard Features

Stainless Steel Interior and Exterior
Self Closing-Reversible Doors
Magnetic Sealing Strip, Easy-removal
Lock and Key
Digital Thermostat
Internal LED Light
Automatic Defrost Cooling System
Lockable Casters



GTSSP29



GTSSP48

SPECIFICATIONS	GTSSP29	GTSSP48	GTSSP60	GTSSP72
Unit Dimensions: (WxDxH- inches)	29x30x45	48x30x45	60x30x45	72x30x4
Door Type	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Capacity (cu..ft.)	7.6	13.8	17.9	21.5
Doors	1	2	2	3
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Voltage	115V/ 60 Hz	115V/ 60 Hz	115V/ 60 Hz	115V/ 60 Hz
Temperature (Fahrenheit)	330 - 410	330 - 410	330 - 410	330 - 410
Interior Light	LED	LED	LED	LED

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Pizza

•PrepTables

Standard Features

- Stainless Steel Interior and Exterior
- Self Closing Reversible Doors
- Magnetic Sealing Strip, Easy Removal
- Lock and Key
- Digital Thermostat
- Automatic Defrost Cooling System
- Internal LED Light
- Lockable Casters



SPECIFICATIONS	GPP-47	GPP-67	GPP-94
Unit Dimensions: (WxDxH- inches)	47x35x42	71x35x42	94x35x42
Capacity (cu.ft.)	11	21	31
Doors	1	2	3
Cooling System	Ventilated	Ventilated	Ventilated
Coolant	R290	R290	R290
Voltage	115v/ 60 Hz	115v/ 60 Hz	115v/ 60 Hz
Temperature (F)	33° - 41°	33° - 41°	33° - 41°
Interior Light	LE D	LE D	LE D

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



CHEST FREEZER

•Solid Top

Standard Features

Adjustable Thermostat

Main Power Indicator

Defrost Water Drain Hole

External Handle with Lock

Baskets per Specification

115 Volt/60 Hz

Casters



SPECIFICATIONS

	GBD-350	GBD-450	GBD-550	GBD-650
Unit Dimensions: (LxDxH)inches	40.50x30.25x33.25	50x30.25x33.25	60.25x30.25x33.25	71.25x30.25x33.25
Interior	34.5x20.5x25.5	44x20.5x25.5	54.25x20.5x25.5	65.25x20.5x25.5
Crated	42x30.25x34.5	52x30.25x34.5	62x30.25x34.5	73x30.25x34.5
Net Capacity (cu.ft.)	9.7cu.ft.	12.7cu.ft.	15.9cu.ft.	19.5cu.ft.
Cooling System	Static	Static	Static	Static
Temperature (Farhenheit)	-20° to +50°	-20° to +50°	-20° to +50°	-20° to +50°
Number of Baskets	R600a	R600a	R600a	R600a
Coolant Type	115v / 60Hz	115v / 60Hz	115v/ 60Hz	115v/ 60Hz
Voltage				

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



FREEZER

Curved Sliding Glass Top

Standard Features

Curved Sliding Glass Top

Aluminized Steel Interior

Exterior White Finish

Aluminum Door Frame

Adjustable Thermostat

Defrost Water Drain Hole

Interior LED Light

115V /60 Hz

Casters



GDQ-320L

GDQ-420L

SPECIFICATIONS

	GDQ-320L	GDQ-420L	GDQ-520L	GDQ-620L
Unit Dimensions: (LxDxHinch)	40x28x34	50x28x34	60x28x34	69x28x34
Weight (lbs)	126lbs.	145lbs.	170lbs.	190lbs.
Net Capacity	9.75cu.ft	12.55cu.ft	15.75cu.ft	19.25cu.ft
Cooling System	Static	Static	Static	Static
Temperature (Fahrenheit)	-20° to +5°	-20° to +5°	-20° to +5°	-20° to +5°
Number of Baskets	3	4	5	6
Coolant Type	R290	R290	R290	R290
Voltage	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Refrigerated Counter Cold Rail

Self Contained

Standard Features

High Performance Refrigerated Condiment Counter
Multiple Pan Configurations Available
Interior and Exterior Stainless Steel
Adjustable Thermostat
Easy to Read Main Power Display
Adjustable Feet



GC4715



Option

Top Glass Guard Assembly
1/6 GS Pans
Legs



GC79-15

SPECIFICATIONS	GC40-15	GC47-15	GC55-15	GC59-15	GC63-15	GC71-15	GC79-15
Unit Dimensions: (WxDxHinch)	40x15x11	47x15x11	55x 15x11	59x15x11	63x 15x11	71x15x11	79x15x11
Net Weight (lbs)	58	62	66	68	70	75	79
1/3PANCapacity	3	4	6	6	7	8	9
Coolant	R600a	R600a	R600a	R600a	R600a	R134a	R600a
Voltage / Freq (V / Hz)	115v/ 60Hz	115v / 60Hz	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz
Temperature (F)	36° ~47°	36° ~47°	36° ~47°	36° ~47°	36° ~47°	36° ~47°	36° ~47°

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Under Counter Refrigerator Cabinets

Standard Features

- Interior & Exterior Stainless Steel
- Insulated Stainless Steel Top
- Magnetic Sealing Strip, Easy Removal
- Self-closing & Reversible Doors
- Digital Thermostat
- Automatic Defrost
- Internal LED Light



GUC-29R



GUC-48R



GUC-72R



GUC-60R

SPECIFICATIONS	GUC-29R	GUC-48R	GUC-60R	GUC-72R
Unit Dimensions: (WxDXHinch)	29x30.3x38.3	48x30.3x38.3	61x30.3x38.3	72x30.3x38.3
Net Capacity (cu.ft.)	6.7	11.1	14.1	16.6
Door	1	2	2	3
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Coolant Type	R290	R290	R290	R290
Voltage (V / Hz)	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz
Temperature (F)	33° - 41°	33° - 41°	33° - 41°	33° - 41°

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.



Under Counter Freezer Cabinets

Standard Features

Interior & Exterior Stainless Steel
Insulated Stainless Steel Top
Magnetic Sealing Strip,
Easy Removal
Self-closing & Reversible Doors
Digital Thermostat
Automatic Defrost
Internal LED Light



GUC-29



GUC-48F



GUC-72F



GUC-60F


SPECIFICATIONS	GUC-29R	GUC-48R	GUC-60R	GUC-72R
Unit Dimensions: (WxDXHinch)	29x30.3x38.3	48x30.3x38.3	61x30.3x38.3	72x30.3x38.3
Net Capacity (cu.ft.)	6.7	11.1	14.1	166.
Door	1	2	2	3
Cooling System	Ventilated	Ventilated	Ventilated	Ventilated
Coolant Type	R290	R290	R290	R290
Voltage (V / Hz)	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz	115v/ 60Hz
Temperature (F)	-10° ~ +10°	-10° ~ +10°	-10° ~ +10°	-10° ~ +10°

Genkraft reserves the right, without notice to make changes and revisions in product specifications, materials, pricing and design, which in our opinion will provide better performance, durability and efficiency.





GENKRAFT

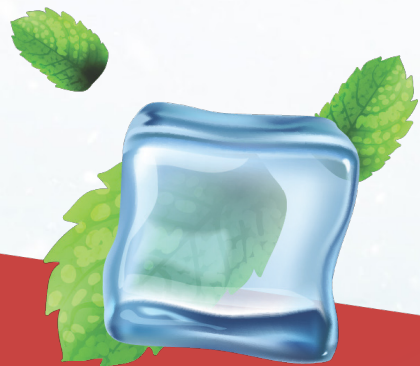

 genkraft.com

 Orders@genkraft.com

 (877) 288-2647 | (562) 464-9901 | (714) 547-9218
Sales: Ext. 105 | Service: Ext. 104

 11990 Rivera Rd. Santa Fe
Springs, CA 90670